

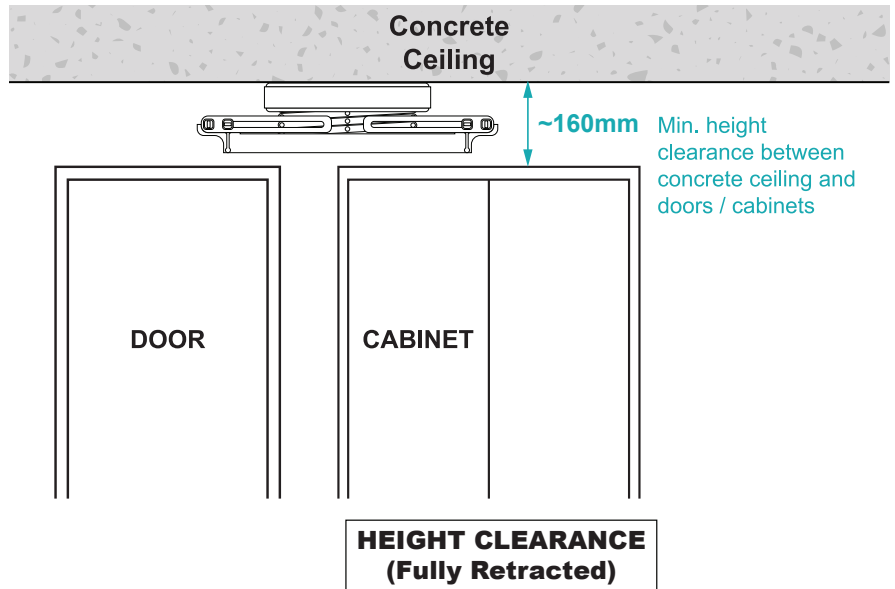
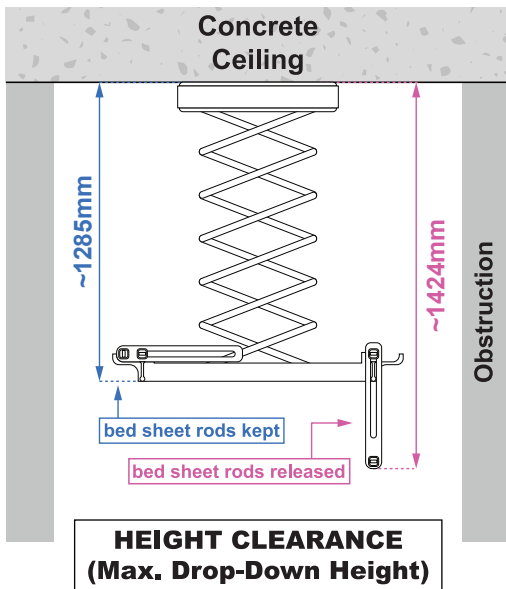


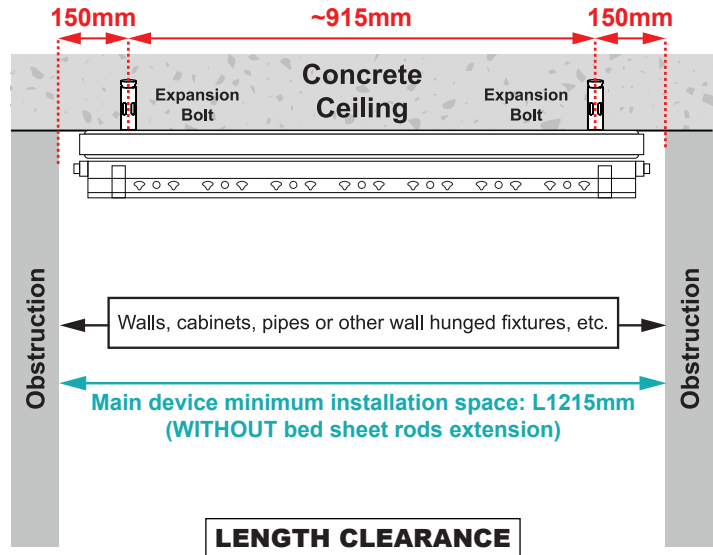

Minimum Installation Space Required (Length x Width x Height)	L1215 x W880 x H160 (mm)
Drop-Down Height	~1424mm

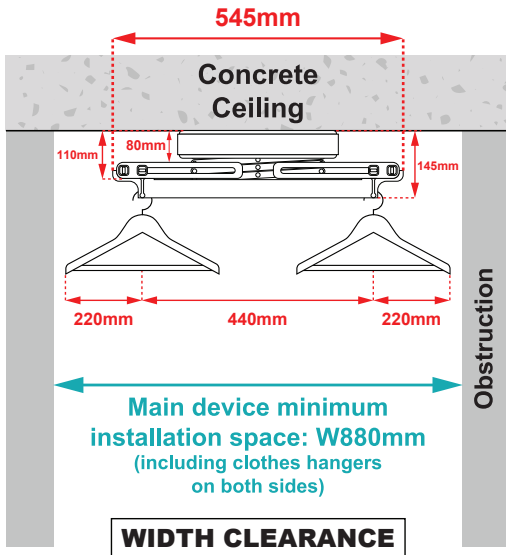


IMPORTANT REQUIREMENTS:

- 13Amp power supply with a heater switch and weatherproof cover if required (service yard)
- Installation on flat surface only.
- Please note that installations on slant or slope ceilings require additional specialized accessories, which will incur an extra cost.
- This device cannot be mounted on a wooden plank above a false ceiling.

Additional service charge, if required:

Transportation for disposal of existing laundry rack	\$30
Cut off existing expansion bolt, grind and patch (without painting)	\$40
Providing 13Amp power supply with exposed casing and a heater switch (tap from the nearest suitable power point)	\$80

Payment: COD upon completion
(Cash or PayNow only)

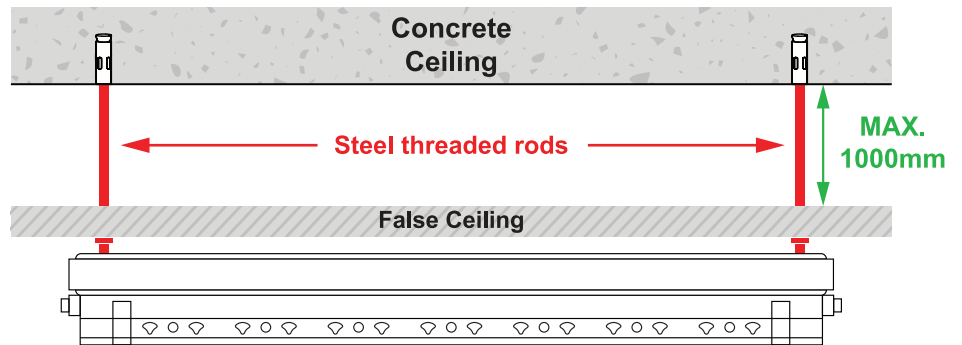

For installations on false ceilings:

- Ensure that there are no obstacles (such as pipes, aircon trunking, cable tray, etc.) blocking the mounting points of the device.
- 4 steel threaded reinforcement rods will be installed to secure the device to the concrete ceiling.
- The gap between the false ceiling and the concrete ceiling (MAX. 1000mm).

Reinforcement support charge based on false ceiling depth:

<300mm	\$200
300mm to 600mm	\$250
600mm to 1000mm	\$300